


modern surface mounted luminaire for LED light sources

TECHNICAL DATA	Mounting: directly on the ceiling Body: powder-painted steel sheet Colour: white
ELECTRICAL DATA	Power supply efficiency: >90% Electrical connection: max 3x2,5 mm ² wire Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Light distribution: symmetric Way of lighting: direct Louver: mat aluminum, matt white aluminum, polished aluminum
ADDITIONAL INFO	Available on request: DALI Lifetime (L70B50): 50 000 h
GENERAL DATA	Warranty: 3 years Application: offices, hospitals, laboratories, supermarkets, classrooms, auditorium



Code	Replacement of conventional technology	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Louver: mat aluminum								
300061.00132	3x14W (57W)	26	29	3350	2800	97	3000	≥80
300061.00133	3x14W (57W)	26	29	3650	2900	100	4000	≥80
300061.00134	4x14W (76W)	35	39	4700	3700	95	3000	≥80
300061.00135	4x14W (76W)	35	39	4850	3850	99	4000	≥80
Louver: matt white aluminum								
300061.00136	3x14W (57W)	26	29	3550	2950	102	3000	≥80
300061.00137	3x14W (57W)	26	29	3650	3050	105	4000	≥80
300061.00138	4x14W (76W)	35	39	4700	3900	100	3000	≥80
300061.00139	4x14W (76W)	35	39	4850	4050	104	4000	≥80
Louver: polished aluminum								
300061.00106	3x14W (57W)	26	29	3350	3000	103	3000	≥80
300061.00107	3x14W (57W)	26	29	3650	3100	107	4000	≥80
300061.00108	4x14W (76W)	35	39	4700	4000	103	3000	≥80
300061.00109	4x14W (76W)	35	39	4850	4100	105	4000	≥80

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
Louver: mat aluminum				
300061.00132	600 324 65	60	1	2.0
300061.00133	600 324 65	60	1	2.0
300061.00134	600 324 65	60	1	2.0
300061.00135	600 324 65	60	1	2.0
Louver: matt white aluminum				
300061.00136	600 324 65	60	1	2.0
300061.00137	600 324 65	60	1	2.0
300061.00138	600 324 65	60	1	2.0
300061.00139	600 324 65	60	1	2.0
Louver: polished aluminum				
300061.00106	600 324 65	60	1	2.0
300061.00107	600 324 65	60	1	2.0
300061.00108	600 324 65	60	1	2.0
300061.00109	600 324 65	60	1	2.0



Luminous flux tolerance +/- 10%.

OTHER PICTURES



Mat aluminum louver




Mat white aluminum louver



Polished aluminum louver

LIGHT BEAM CURVES

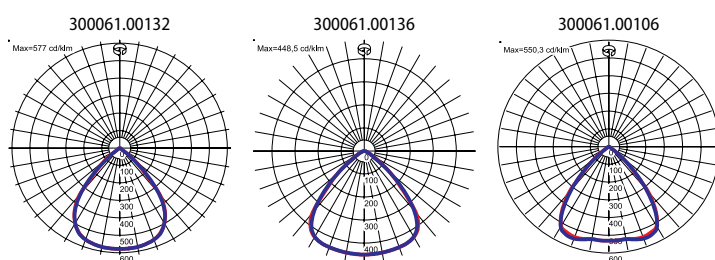

Luminous flux tolerance +/- 10%.