


modern LED luminaire for quick assembly, construction of the luminaire enables quick, easy and tool-less connection into long lighting systems (available in 1,5m and 3m-long dimension) by the usage of mounting elements

TECHNICAL DATA	Mounting: suspended, on wire suspension (on request) Body: powder-painted steel sheet Colour: white Diffuser: acrylic (PMMA)
ELECTRICAL DATA	Electrical connection: max 5x2,5 mm ² wire Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Way of lighting: direct Operating temperature range: 0°C ... +25°C
ADDITIONAL INFO	Lifetime (L70B50): 50 000 h Warranty: 3 years + 2 years after project registration
GENERAL DATA	Application: supermarkets, warehouses, logistics centers, warehouses



Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
080141.5L01.111	30	33	3150	2800	85	3000	≥81
080141.5L02.111	29	32	3550	3100	97	4000	≥81
080141.5L03.111	43	46	4850	4300	93	3000	≥81
080141.5L04.111	42	45	5500	4800	107	4000	≥81
080141.5L05.111	54	58	5700	5000	86	3000	≥81
080141.5L06.111	52	56	6400	5700	102	4000	≥81
080141.5L07.111	74	78	8000	7000	90	3000	≥81
080141.5L08.111	70	74	9200	8100	109	4000	≥81
080141.5L09.211	60	66	6350	5600	85	3000	≥81
080141.5L10.211	58	64	7150	6300	98	4000	≥81
080141.5L11.211	86	92	9650	8500	92	3000	≥81
080141.5L12.211	84	90	10950	9500	106	4000	≥81
080141.5L13.211	108	116	11400	10000	86	3000	≥81
080141.5L14.211	104	112	12850	11300	101	4000	≥81
080141.5L15.211	148	156	15950	14100	90	3000	≥81
080141.5L16.211	140	148	18350	16200	109	4000	≥81

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
080141.5L01.111	1500 111 85	98	1	3.2
080141.5L02.111	1500 111 85	98	1	3.2
080141.5L03.111	1500 111 85	98	1	3.2
080141.5L04.111	1500 111 85	98	1	3.2
080141.5L05.111	1500 111 85	98	1	3.2
080141.5L06.111	1500 111 85	98	1	3.2
080141.5L07.111	1500 111 85	98	1	3.2
080141.5L08.111	1500 111 85	98	1	3.2
080141.5L09.211	3000 111 85	98	1	6.4
080141.5L10.211	3000 111 85	98	1	6.4
080141.5L11.211	3000 111 85	98	1	6.4
080141.5L12.211	3000 111 85	98	1	6.4
080141.5L13.211	3000 111 85	98	1	6.4
080141.5L14.211	3000 111 85	98	1	6.4
080141.5L15.211	3000 111 85	98	1	6.4

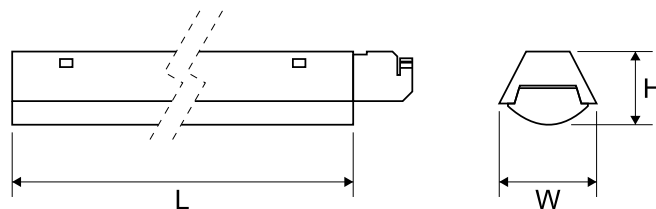

Luminous flux tolerance +/- 10%.

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
080141.5L16.211	3000 111 85	98	1	6.4

OTHER PICTURES



ACCESSORIES



150111.00815

LUGTRACK 5 BULB LED Starter KIT (1x power connector, 2x end cap, 1x mounting bracket)



150110.00819

Suspension chain (2m)

150110.00820

Suspension chain (4m)



150110.00223

Set of safety swing hook and knurled thumb nuts for luminaire (2 pcs. for 3m luminaire)

Luminous flux tolerance +/- 10%.