




industrial luminaire for LED light sources

TECHNICAL DATA	Mounting: suspended, with mounting brackets (on request) Body: high pressure die-cast aluminum Colour: gray Diffuser: tempered glass
ELECTRICAL DATA	Power supply efficiency: >90% Electrical connection: STUCCHI connector Power: 220-240V 50/60Hz Includes light source: yes
OPTICAL DATA	Type of equipment: ED Way of lighting: direct
ADDITIONAL INFO	Operating temperature range: -20°C ... +35°C Lifetime (L70B50): 50 000 h
GENERAL DATA	Warranty: 3 years Application: warehouses, logistics centers, industrial facilities, sport facilities, roofing



Code	Replacement of conventional technology	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
300092.00054	250W	116°	130	145	19300	16200	112	4000	≥81

Code	Dimensions [mm] L W H D	Quantity in package	Net weight [kg]
300092.00054	540 338 102 488	1	6.5

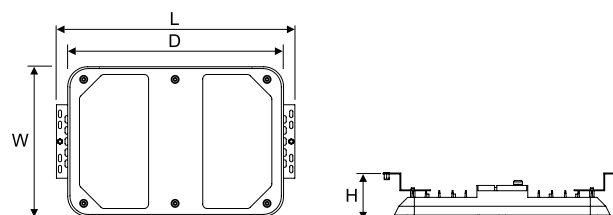

ACCESSORIES

150160.00634	Mouniting brackets
--------------	--------------------

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.luglightfactory.com