


Tubo T8 LED PC

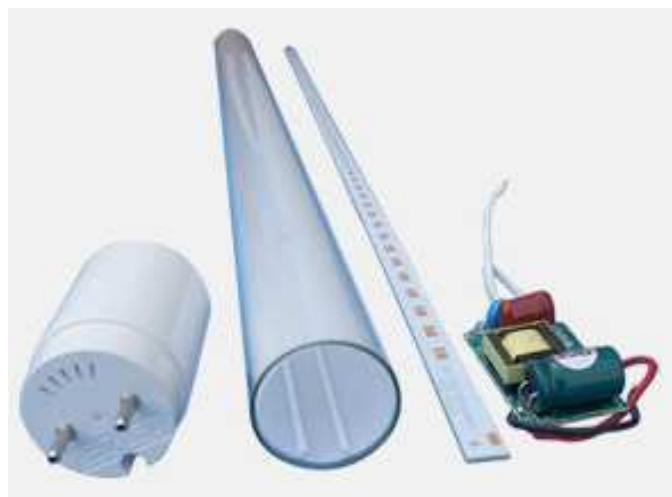

Parámetros Básicos


Código	Cubierta	Longitud	Temperatura de Color	Flujo Luminoso (LM)	Potencia	CRI	Voltaje	Ángulo lumínico	Factor de Potencia
ES-LPT809-60	Transparente	600 mm.	6000-7000K	990±10%	9 W	Ra 80	AC110V-277V 50/60HZ	320°	≥0.95
ES-LPT809-40			4000-5000K	990±10%					
ES-LPT809-30			3000-4000K	990±10%					
ES-LPT818-60	Transparente	1.200 mm.	6000-7000K	2.160±10%	18 W	Ra 80	AC110V-277V 50/60HZ	320°	≥0.95
ES-LPT818-40			4000-5000K	2.160±10%					
ES-LPT818-30			3000-4000K	2.160±10%					
ES-LPT822-60	Transparente	1.500 mm.	6000-7000K	2.320±10%	22 W	Ra 80	AC110V-277V 50/60HZ	320°	≥0.95
ES-LPT822-40			4000-5000K	2.320±10%					
ES-LPT822-30			3000-4000K	2.320±10%					
ES-LPO809-60	Opaco	600 mm.	6000-7000K	910±10%	9 W	Ra 80	AC110V-277V 50/60HZ	320°	≥0.95
ES-LPO809-40			4000-5000K	910±10%					
ES-LPO809-30			3000-4000K	910±10%					
ES-LPO818-60	Opaco	1.200 mm.	6000-7000K	1.920±10%	18 W	Ra 80	AC110V-277V 50/60HZ	320°	≥0.95
ES-LPO818-40			4000-5000K	1.920±10%					
ES-LPO818-30			3000-4000K	1.920±10%					
ES-LPO822-60	Opaco	1.500 mm.	6000-7000K	2.290±10%	22 W	Ra 80	AC110V-277V 50/60HZ	320°	≥0.95
ES-LPO822-40			4000-5000K	2.290±10%					
ES-LPO822-30			3000-4000K	2.290±10%					

Otros Parámetros

Tipo LED	Longitud LED	Nº Diodos LED	Materiales Fabricación	Peso Neto	Embalaje
EPISTAR 2835 SMD	600 mm.	74 Und.	Cuerpo de cubierta de policarbonato (PC)	0,21 Kg.	655x190x275 mm. 25PCS por caja
	1.200 mm.	148 Und.		0,37 Kg.	1.265x190x275 mm. 25PCS por caja
	1.500 mm.	185 Und.		0,44 Kg.	1.565x190x275 mm. 25PCS por caja

Nota: Sólo uso interiores, Temperaturas de trabajo -20°C / 40°C


Medidas del tubo T8

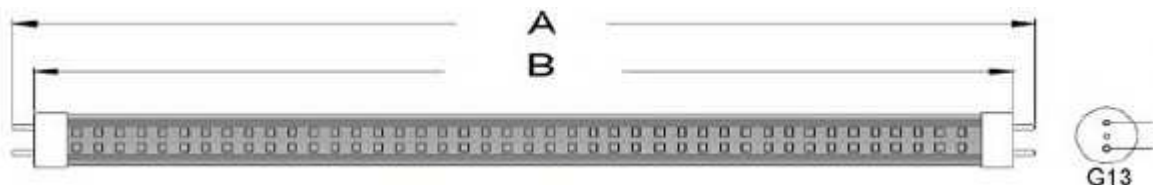


600 mm.	A 604 mm.	B 590 mm.
1.200 mm.	A 1.214 mm.	B 1.200 mm.
1.500 mm.	A 1.514 mm.	B 1.500 mm.

Installation Instruction

Inductance Ballast Retrofit

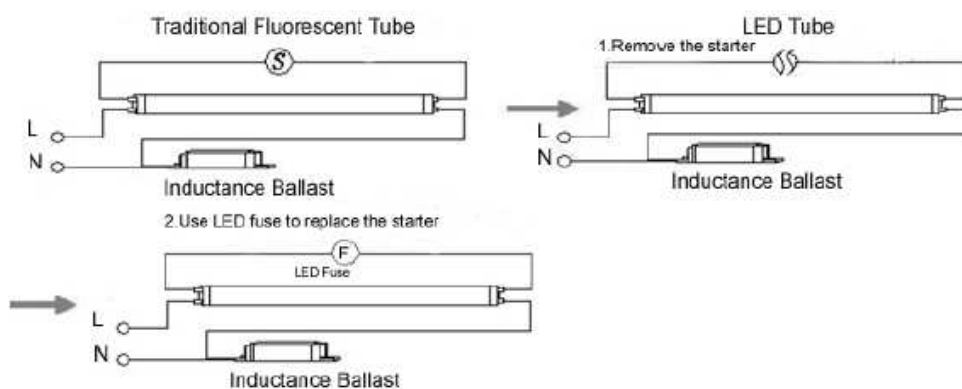

Electronic Ballast Retrofit

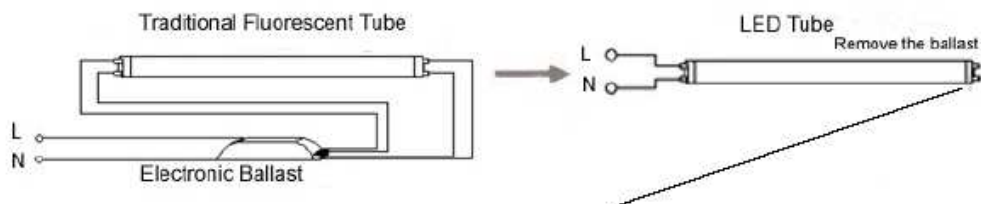

Note: Two pins are connected this side , please install the tube according to the instruction to avoid short circuit